



AGRI-TECH®

DISTRIBUTORS OF HOSE
AND ALLIED PRODUCTS


www.agri-tech.co.za

+27 21 949 5844

info@agri-tech.co.za

Cnr Willow & Tedric Street, Stikland
Bellville, Cape Town, South Africa, 7530

Heavy Duty Bolted Hose-Clamps

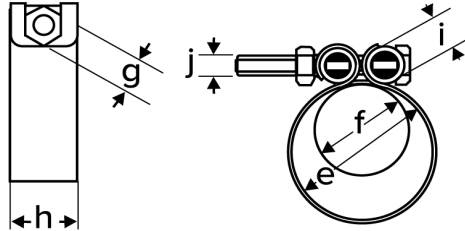

Fixed Dimensions	Ref	A	B	C
	g	10mm	13mm	19mm
	h	19mm	25mm	32mm
	i	11mm	14mm	20mm
	j	M6	M8	M12
e/f	# see table			

The simplistic, compact and yet highly effective design provides a quality, cost-effective solution for larger clamping applications.

The UniClamp is designed with the set screw recessed into a round trunnion for easy installation and has a guide to prevent the fastener from damaging hoses. No welding minimises the risk of corrosion. They are suitable for all plastic and rubber hoses. UniClamps are re-useable.

Standard Steel REF	Stainless Steel REF	Ø - e & f) Diameter Range		Common Application Reference*	Modified Range *mm
		mm	inches		
A 23	SA23	23-26	7/8 - 1	20mmP&R	18-21
A 26	SA26	26-29	1 - 1 1/8		21-24
A 29	SA29	29-32	1 1/8 - 1 1/4	25mmP&R	24-27
A 31	SA31	31-34	1 1/4 - 1 5/16		23-26
A 37	SA37	37-41	1 1/2 - 1 5/8	32mmP&R	25-29
A 41	SA41	41-46	1 5/8 - 1 13/16	40mmP&R	31-35
A 45	SA45	45-50	1 3/4 - 2		35-40
A 54	SA54	54-61	2 1/8 - 2 5/8	50mmP&R	48-55
A 65	SA65	65-72	2 5/8 - 2 15/16	65mmP&R	59-66
A 82	SA82	82-89	3 1/4 - 3 1/2	80mmP&R	76-83
B 30	SB30	30-34	1 3/16 - 1 5/16		23-27
B 34	SB34	34-38	1 5/16 - 1 1/2		27-31
B 37	SB37	37-41	1 1/2 - 1 5/8		30-34
B 40	SB40	40-45	1 9/16 - 1 3/4	32mmIB	33-38
B 43	SB43	43-48	1 11/16 - 1 7/8		36-41
B 46	SB46	46-52	1 13/16 - 2 1/16	40mmIBO(v)	39-45
B 48	SB48	48-54	1 7/8 - 2 1/8	40mmIB	41-47
B 54	SB54	54-60	2 1/8 - 2 3/8		51-59
B 58	SB58	58-66	2 5/16 - 2 5/8		55-63
B 62	SB62	62-70	2 7/16 - 2 3/4	50mmIB	59-67
B 66	SB66	66-74	2 5/8 - 2 15/16		63-71
B 70	SB70	70-78	2 3/4 - 3 1/16	65mmIB	67-75
B 74	SB74	74-82	2 15/16 - 3 1/4		71-79
B 78	SB78	78-86	3 1/16 - 3 3/8		75-83
B 82	SB82	82-90	3 1/4 - 3 9/16		79-87
B 86	SB86	86-94	3 3/8 - 3 11/16		87-95
B 94	SB94	94-102	3 11/16 - 4	80mmIB	95-103
B 102	SB102	102-110	4 - 4 5/16		103-111
B 110	SB110	110-118	4 5/16 - 4 5/8		111-119
B 118	SB118	118-126	4 5/8 - 4 15/16		108-118
C 82	SC82	82-94	3 1/4 - 3 11/16		72-84
C 88	SC88	88-100	3 7/16 - 3 15/16		78-90
C 94	SC94	94-106	3 11/16 - 4 3/16		84-96
C 106	SC106	106-118	4 3/16 - 4 5/8		96-108
C 112	SC112	112-124	4 7/16 - 4 7/8		102-114
C 118	SC118	118-130	4 5/8 - 5 1/8		108-120
C 130	SC130	130-142	5 1/8 - 5 5/16		120-132
C 142	SC142	142-154	5 5/16 - 6 1/16	IB = Internal Bore	132-144
C 154	SC154	154-166	6 1/16 - 6 9/16		144-156
C 166	SC166	166-178	6 9/16 - 7		156-168
C 178	SC178	178-190	7 - 7 1/2		168-180
C 190	SC190	190-202	7 1/2 - 7 15/16		180-192
C 202	SC202	202-214	7 15/16 - 8 7/16	*P&R = Plastic & Rubber	192-204
C 214	SC214	214-226	8 7/16 - 8 7/8		204-216
C 226	SC226	226-238	8 7/8 - 9 3/8		216-228
C 238	SC238	238-250	9 3/8 - 9 7/8		228-240
C 250	SC250	250-262	9 7/8 - 10 5/16	E & EO	240-252

*Other sizes available on request. E&OE

Standard UniClamp Series

The Standard Steel Clamp is constructed from a 400-series steel band with zinc-plated carbon steel set-screw and trunnions. Ideal for agricultural, industrial or heavy vehicle applications.


316 Stainless Steel Series

This fully stainless steel heavy duty clamp is manufactured from an acid resistant 316 stainless steel band with matching 316 stainless steel set-screw, nut and trunnion. It is ideal for marine, mining or chemical applications where there is a heavy clamping requirement in a highly corrosive environment.

Super convenient additional option:

The 'Modified Range' Option

The UniClips Series allows the option of reducing the clamping range in the field (without any special tooling being required) by simply rolling the band over the Trunnion. See diagram.

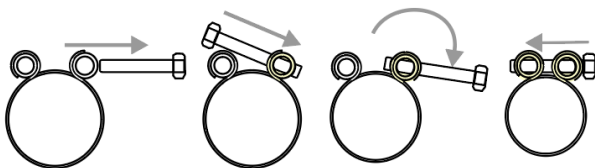

Our company's policy is one of continuous product innovation, and we reserve the right to change specifications without notice. Any such changes would benefit customers and be driven by our response to market requirements and changing specifications.